



G-100 Eye Self Locking Hook

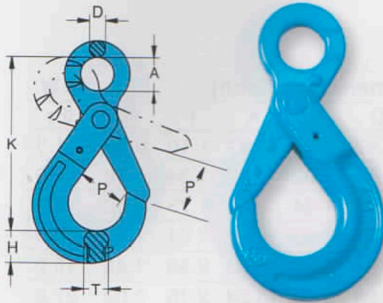

Item No.	Working Load Limit		For Grade 100 Chain	Dimensions (inch)						N.W.
	lbs*	tonnes*	inch	A	D	H	K	P	T	lbs
X-025-06	3,200	1.4	7/32	0.83	0.39	0.87	4.33	1.10	0.59	1.1
X-025-07	5,700	2.5	1/4-5/16	0.98	0.43	1.02	5.35	1.34	0.79	1.8
X-025-10	8,800	4.0	3/8	1.26	0.51	1.34	6.57	1.73	1.02	3.3
X-025-13	15,000	6.7	1/2	1.57	0.63	1.65	8.15	2.01	1.18	6.6
X-025-16	22,600	10.0	5/8	1.97	0.83	2.20	9.92	2.36	1.42	12.8
X-025-20	35,300	16.0	3/4	2.36	0.91	2.56	11.42	2.76	2.09	22.0
X-025-22	42,700	19.0	7/8	2.76	0.94	2.80	12.56	3.15	1.93	27.5
X-025-26	59,700	26.5	1	3.15	0.98	3.11	13.50	3.90	2.20	33.0

★ Design factor 4:1 proof tested and certified.

G-100 Clevis Self Locking Hook

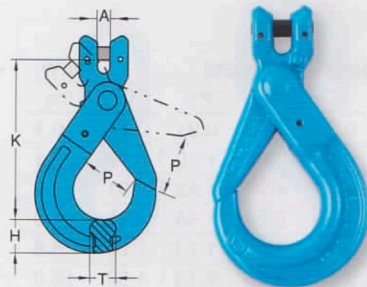


Item No.	Working Load Limit		For Grade 100 Chain	Dimensions (inch)					N.W.
	lbs*	tonnes*	inch	A	H	K	P	T	lbs
X-026-06	3,200	1.4	7/32	0.27	0.87	3.66	1.10	0.59	1.1
X-026-07	5,700	2.5	1/4-5/16	0.40	1.02	4.69	1.34	0.79	1.8
X-026-10	8,800	4.0	3/8	0.48	1.34	5.59	1.73	1.02	3.3
X-026-13	15,000	6.7	1/2	0.60	1.65	7.01	2.01	1.18	6.6
X-026-16	22,600	10.0	5/8	0.73	2.20	8.39	2.36	1.42	12.5
X-026-20	35,300	16.0	3/4	0.86	2.56	9.61	2.76	2.09	22.5
X-026-22	42,700	19.0	7/8	0.99	2.80	10.75	3.15	1.93	24.0

★ Design factor 4:1 proof tested and certified.

G-100 Swivel Self Locking Hook

with Brass Bushing.

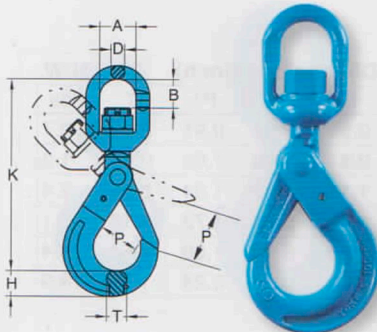

Item No.	Working Load Limit		For Grade 100 Chain	Dimensions (inch)							N.W.
	lbs*	tonnes*	inch	A	B	D	H	K	P	T	lbs
X-027-06	3,200	1.4	7/32	1.26	0.87	0.47	0.87	5.87	1.10	0.59	1.3
X-027-07	5,700	2.5	1/4-5/16	1.42	1.14	0.51	1.02	7.32	1.34	0.79	2.6
X-027-10	8,800	4.0	3/8	1.61	1.34	0.63	1.34	8.58	1.73	1.02	4.4
X-027-13	15,000	6.7	1/2	1.81	1.69	0.83	1.65	10.87	2.01	1.18	9.0
X-027-16	22,600	10.0	5/8	2.40	1.97	0.91	2.20	12.95	2.36	1.42	15.0
X-027-20	35,300	16.0	3/4	2.91	3.23	0.98	2.56	15.24	2.76	2.09	27.8
X-027-22	42,700	19.0	7/8	3.82	3.74	1.30	2.80	17.99	3.15	1.93	39.6
X-027-26	59,700	26.5	1	4.84	4.53	2.01	3.11	21.06	3.90	2.20	69.3

★ Design factor 4:1 proof tested and certified.

⚠ WARNING INFORMATION: This hook is a positioning device and is not intended to rotate under load. For swivel hooks designed to rotate under load, see pages 116 X-027N.