


G-100 Swivel Self Locking Hook

with Ball Bearing, which performs full swivel under load.

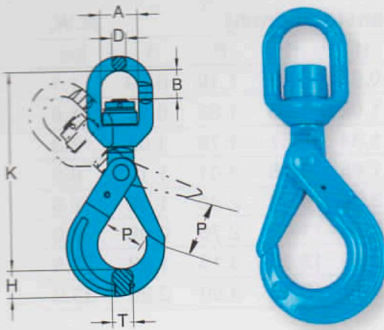


Item No.	Working Load Limit		For Grade 100 Chain	Dimensions (inch)							N.W.
	lbs*	tonnes*	inch	A	B	D	H	K	P	T	lbs
X-027N-06	3,200	1.4	7/32	1.26	0.87	0.47	0.87	5.87	1.10	0.59	1.3
X-027N-07	5,700	2.5	1/4-5/16	1.42	1.14	0.51	1.02	7.32	1.34	0.79	2.6
X-027N-10	8,800	4.0	3/8	1.61	1.34	0.63	1.34	8.58	1.73	1.02	4.4
X-027N-13	15,000	6.7	1/2	1.81	1.69	0.83	1.65	10.87	2.01	1.18	9.0
X-027N-16	22,600	10.0	5/8	2.40	1.97	0.91	2.20	12.95	2.36	1.42	15.0
X-027N-20	35,300	16.0	3/4	2.91	3.23	0.98	2.56	15.24	2.76	2.09	27.8
X-027N-22	42,700	19.0	7/8	3.82	3.74	1.30	2.80	17.99	3.15	1.93	39.6
X-027N-26	59,700	26.5	1	4.84	4.53	2.01	3.11	21.06	3.90	2.20	69.3

★ Design factor 4:1 proof tested and certified.

G-100 Eye Sling Hook

with Latch

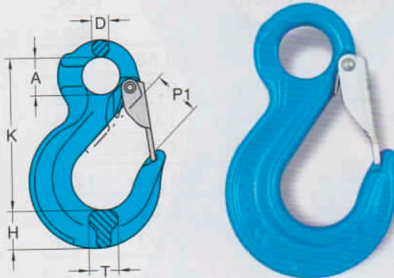


Item No.	Working Load Limit		For Grade 100 Chain	Dimensions (inch)						N.W.
	lbs*	tonnes*	inch	A	D	H	K	P1	T	lbs
X-044/S-06	3,200	1.4	7/32	0.79	0.39	0.75	3.15	0.91	0.67	0.7
X-044/S-07	5,700	2.5	1/4-5/16	0.98	0.47	0.91	3.86	1.10	0.79	1.1
X-044/S-10	8,800	4.0	3/8	1.26	0.59	1.22	4.76	1.42	0.91	2.2
X-044/S-13	15,000	6.7	1/2	1.57	0.71	1.50	5.98	1.58	1.06	4.0
X-044/S-16	22,600	10.0	5/8	1.97	0.87	1.77	7.28	1.73	1.26	6.8
X-044/S-20	35,300	16.0	3/4	2.44	1.06	2.51	9.05	2.13	1.89	16.0
X-044/S-22	42,700	19.0	7/8	2.01	1.22	2.48	9.65	2.99	2.05	20.5
X-044/S-26	59,700	26.5	1	2.56	1.38	3.07	11.22	3.03	2.36	28.6
X-044/S-32	90,400	40.0	1-1/4	3.45	1.57	3.15	13.86	4.49	2.56	37.4

★ Design factor 4:1 proof tested and certified.

G-100 Clevis Sling Hook

with Latch

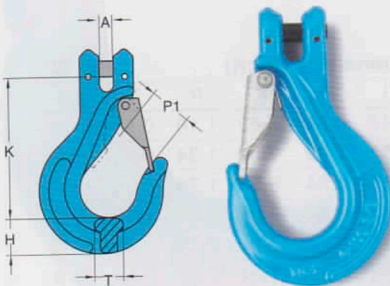

Item No.	Working Load Limit		For Grade 100 Chain	Dimensions (inch)					N.W.
	lbs*	tonnes*	inch	A	H	K	P1	T	lbs
X-043/S-06	3,200	1.4	7/32	0.24	0.91	3.82	0.91	0.59	0.7
X-043/S-07	5,700	2.5	1/4-5/16	0.35	0.87	3.86	1.06	0.71	1.3
X-043/S-10	8,800	4.0	3/8	0.43	1.18	4.80	1.34	0.94	2.4
X-043/S-13	15,000	6.7	1/2	0.55	1.46	5.79	1.73	1.18	5.1
X-043/S-16	22,600	10.0	5/8	0.67	1.65	6.54	1.89	1.54	8.4
X-043/S-20	35,300	16.0	3/4	0.94	2.52	8.15	2.24	1.89	18.9

★ Design factor 4:1 proof tested and certified.