


G-100 Alloy Eye Hoist Hook

with Latch



| Item No. | Hook Feature Code | Working Load Limit | | For Grade 100 Chain inch | Dimensions (inch) | | | | | | | | N.W. lbs |
|-----------|-------------------|--------------------|---------|-----------------------------|-------------------|------|------|------|-------|------|------|------|-------------|
| | | lbs* | tonnes* | | A | D | d | H | K | P | P1 | T | |
| 8-173-015 | BB | 3,200 | 1.4 | 7/32 | 0.91 | 0.75 | 0.43 | 0.83 | 3.74 | 0.95 | 0.75 | 0.67 | 0.9 |
| 8-173-02 | CC | 5,700 | 2.5 | 1/4-5/16 | 1.14 | 0.79 | 0.51 | 1.02 | 4.17 | 1.06 | 0.79 | 0.83 | 1.5 |
| 8-173-03 | DD | 8,800 | 4.0 | 3/8 | 1.26 | 0.98 | 0.59 | 1.14 | 4.80 | 1.22 | 0.98 | 0.95 | 2.0 |
| 8-173-05 | EE | 15,000 | 6.7 | 1/2 | 1.57 | 1.22 | 0.71 | 1.46 | 5.87 | 1.42 | 1.22 | 1.22 | 4.6 |
| 8-173-07 | FF | 22,600 | 10.0 | 5/8 | 2.00 | 1.54 | 0.95 | 1.85 | 7.56 | 1.77 | 1.54 | 1.46 | 8.8 |
| 8-173-11 | GG | 35,300 | 16.0 | 3/4 | 2.44 | 2.24 | 1.10 | 2.28 | 9.13 | 2.40 | 2.24 | 1.89 | 15.2 |
| 8-173-15 | HH | 42,700 | 19.0 | 7/8 | 2.84 | 2.44 | 1.26 | 2.60 | 10.10 | 2.83 | 2.44 | 2.20 | 22.0 |

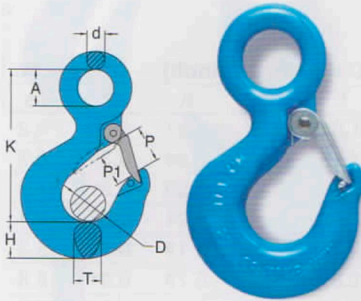

When using hoist hook with grade 100 chain, YOKE hoist hook is recommended to grind the WLL (which is for a safety factor 5:1) off the hook.


★ Minimum Ultimate Load is 4 times the Working Load Limit.
Maximum Proof Load is 2.5 times the Working Load Limit.



Latch Kits

G-100 Alloy Swivel Hoist Hook

with Brass Washer



| Item No. | Hook Feature Code | Working Load Limit | | For Grade 100 Chain inch | Dimensions (inch) | | | | | | | | | | | N.W. lbs |
|-----------|-------------------|--------------------|---------|-----------------------------|-------------------|------|------|------|------|------|-------|-------|------|------|------|-------------|
| | | lbs* | tonnes* | | A | B | C | D | G | H | K | L | P | P1 | T | |
| 8-175-015 | BB | 3,200 | 1.4 | 7/32 | 1.26 | 0.91 | 0.97 | 0.45 | 3.15 | 0.84 | 4.96 | 6.23 | 0.95 | 0.75 | 0.71 | 1.5 |
| 8-175-02 | CC | 5,700 | 2.5 | 1/4-5/16 | 1.42 | 1.14 | 1.03 | 0.49 | 3.66 | 1.00 | 5.63 | 7.15 | 1.06 | 0.79 | 0.88 | 2.0 |
| 8-175-03 | DD | 8,800 | 4.0 | 3/8 | 1.62 | 1.38 | 1.16 | 0.63 | 4.02 | 1.13 | 7.73 | 8.36 | 1.22 | 0.98 | 0.95 | 3.3 |
| 8-175-05 | EE | 15,000 | 6.7 | 1/2 | 1.83 | 1.73 | 1.53 | 0.83 | 5.14 | 1.41 | 8.32 | 10.58 | 1.42 | 1.22 | 1.22 | 7.0 |
| 8-175-07 | FF | 22,600 | 10.0 | 5/8 | 2.40 | 1.99 | 1.94 | 0.89 | 6.60 | 1.82 | 10.18 | 12.92 | 1.77 | 1.54 | 1.42 | 12.5 |
| 8-175-11 | GG | 35,300 | 16.0 | 3/4 | 2.92 | 3.25 | 2.46 | 0.99 | 7.72 | 2.28 | 12.84 | 16.11 | 2.40 | 2.24 | 1.89 | 21.2 |
| 8-175-15 | HH | 42,700 | 19.0 | 7/8 | 3.83 | 3.78 | 2.59 | 1.30 | 8.70 | 2.53 | 14.64 | 18.55 | 2.83 | 2.44 | 2.20 | 35.1 |




When using hoist hook with grade 100 chain, YOKE hoist hook is recommended to grind the WLL (which is for a safety factor 5:1) off the hook.

★ Minimum Ultimate Load is 4 times the Working Load Limit.
Maximum Proof Load is 2.5 times the Working Load Limit.

⚠ **WARNING INFORMATION:** This hook is a positioning device and is not intended to rotate under load. For swivel hooks designed to rotate under load, see p.117 8-175N.

G-100 Alloy Swivel Bearing Hoist Hook

with Ball Bearing, which performs full swivel under load.

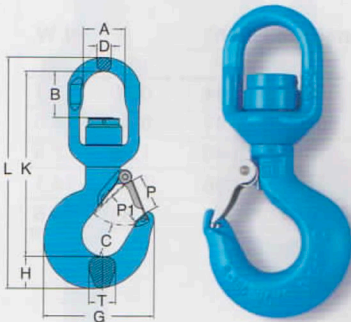

| Item No. | Hook Feature Code | Working Load Limit | | For Grade 100 Chain inch | Dimensions (inch) | | | | | | | | | | | N.W. lbs |
|------------|-------------------|--------------------|---------|-----------------------------|-------------------|------|------|------|------|------|-------|-------|------|------|------|-------------|
| | | lbs* | tonnes* | | A | B | C | D | G | H | K | L | P | P1 | T | |
| 8-175N-015 | BB | 3,200 | 1.4 | 7/32 | 1.26 | 0.91 | 0.97 | 0.45 | 3.15 | 0.84 | 4.96 | 6.23 | 0.95 | 0.75 | 0.71 | 1.5 |
| 8-175N-02 | CC | 5,700 | 2.5 | 1/4-5/16 | 1.42 | 1.14 | 1.03 | 0.49 | 3.66 | 1.00 | 5.63 | 7.15 | 1.06 | 0.79 | 0.88 | 2.0 |
| 8-175N-03 | DD | 8,800 | 4.0 | 3/8 | 1.62 | 1.38 | 1.16 | 0.63 | 4.02 | 1.13 | 7.73 | 8.36 | 1.22 | 0.98 | 0.95 | 3.3 |
| 8-175N-05 | EE | 15,000 | 6.7 | 1/2 | 1.83 | 1.73 | 1.53 | 0.83 | 5.14 | 1.41 | 8.32 | 10.58 | 1.42 | 1.22 | 1.22 | 7.0 |
| 8-175N-07 | FF | 22,600 | 10.0 | 5/8 | 2.40 | 1.99 | 1.94 | 0.89 | 6.60 | 1.82 | 10.18 | 12.92 | 1.77 | 1.54 | 1.42 | 12.5 |
| 8-175N-11 | GG | 35,300 | 16.0 | 3/4 | 2.92 | 3.25 | 2.46 | 0.99 | 7.72 | 2.28 | 12.84 | 16.11 | 2.40 | 2.24 | 1.89 | 21.2 |
| 8-175N-15 | HH | 42,700 | 19.0 | 7/8 | 3.83 | 3.78 | 2.59 | 1.30 | 8.70 | 2.53 | 14.64 | 18.55 | 2.83 | 2.44 | 2.20 | 36.3 |



When using hoist hook with grade 100 chain, YOKE hoist hook is recommended to grind the WLL (which is for a safety factor 5:1) off the hook.

★ Minimum Ultimate Load is 4 times the Working Load Limit.
Maximum Proof Load is 2.5 times the Working Load Limit.